


TECHNICAL DETAILS//MS 939

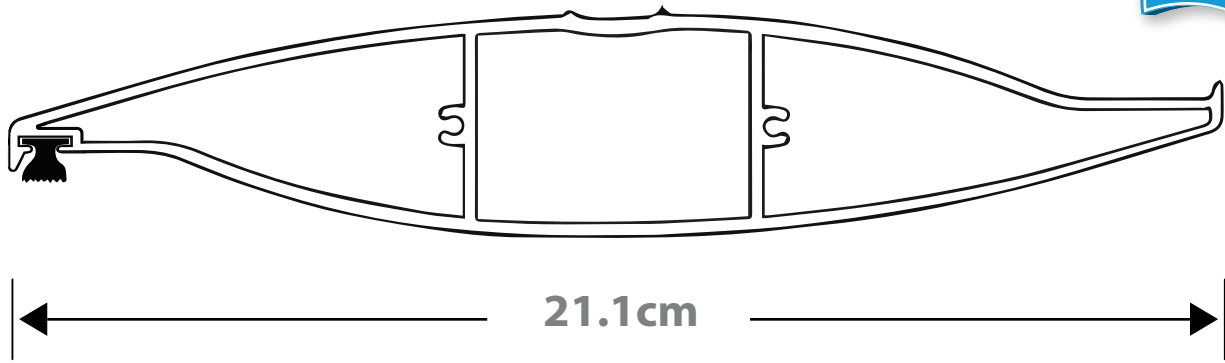

BLADE SPECIFICATIONS


// Blade cover - opening system _____	200 mm	// Weight per lineal metre _____	2.110 kgm
// Weight per square metre - opening system _____	10.55 kg/sqm	// Actual blade width _____	211.1 mm
// Blade centres - opening system _____	200 mm		

INSTALLATION OPTIONS

OPENING DIRECTION OF BLADES



The blades can be placed horizontally or vertically to cover any building opening.

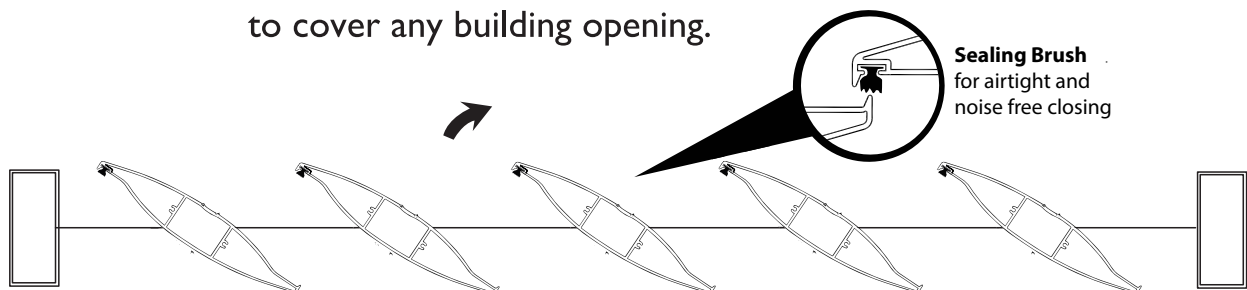

MAMAS STAVROU LTD
Aluminium Pergolas
Sun-breakers & Louvers

Τηλ.: 22 429151, 22 420069. Φαξ: 22 316609


www.mamastavrou.com



Remote control operation

IMPORTANT PLEASE NOTE: We recommend that at an early stage involve your electrician. This applies for both new and existing buildings. Determine with us how to achieve the outcomes you would like against possible limitations caused by the building. Mamas Stavrou Ltd will provide a wiring diagram and installation instructions.

The remote control unit controls up to 5 linear actuators simultaneously or individually. Maximum construction size per linear actuator 20m².

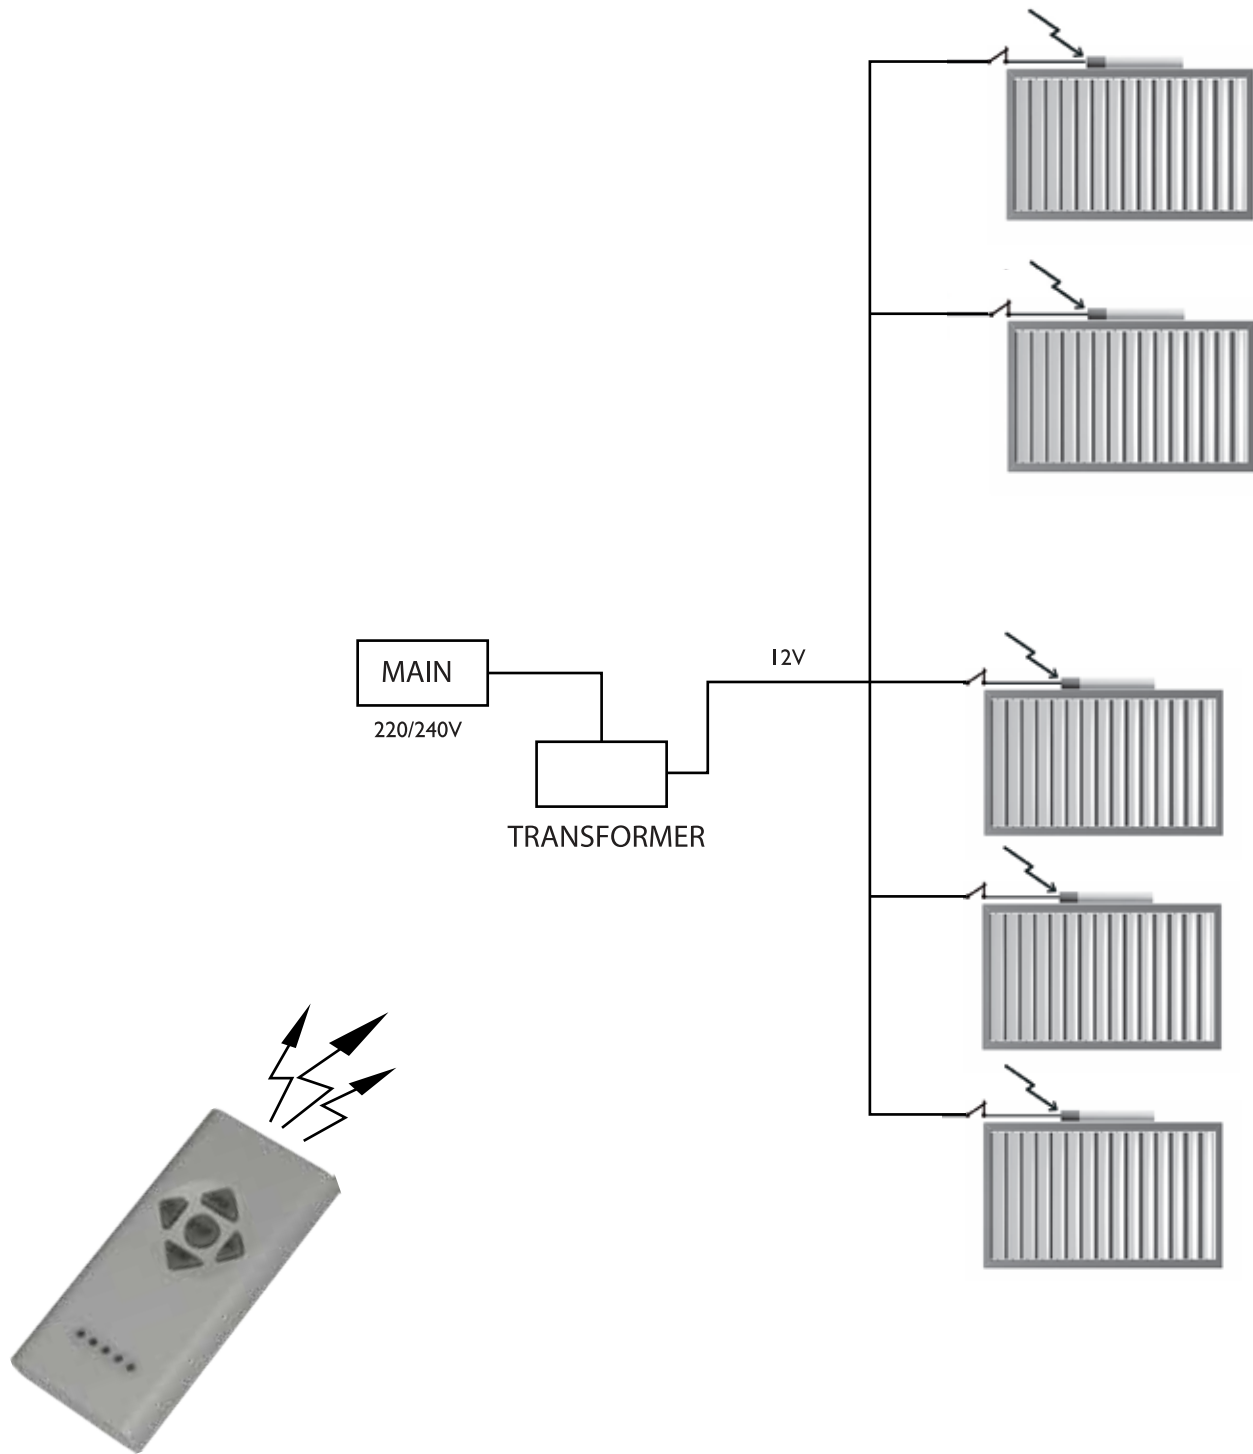

MAMAS STAVROU LTD
Aluminium Pergolas
Sun-breakers & Louvers
Τηλ.: 22 429151, 22 420069. Φαξ: 22 316609

www.mamastavrou.com



REMOTE CONTROL OPERATION - PARTS



1.5 A Tranformer



Receiver



2.5 A Tranformer



Switch



6.3 A Tranformer



Linear Actuator



5 CH Transmitter



MANUAL OPERATION

Sun blockers can easily be operated manually as well as electrically.

Manual operation is specially suited for houses and relatively small openings.

The Manual operation system consists of a stainless steel window stay that controls the opening and a stainless steel knob that controls the movement of the sun blocker blades.

The whole system is designed and tested to operate smoothly under any conditions.



MAMAS STAVROU LTD
Aluminium Pergolas
Sun-breakers & Louvers
Τηλ.: 22 429151, 22 420069. Φαξ: 22 316609

www.mamastavrou.com

